



PRODUCT CATALOGUE

PATIENT MONITOR



CMS 8000



CMS 7000



CMS 9000



8.4" LCD Display.

CMS 6000



COMEN STAR 8000E



MM 750



YK 8000C



MM 5012



CMS - 5100



CMS - 70A



YK-820B



CMS - 60C



CMS-50D



ABPM-50

OPTIONAL



IBP MODULE



ETCO2 MODULE



CENTRAL MONITORING SYSTEM

3 PARA MONITOR & PULSE OXIMETER

ECG MACHINE




SYRINGE PUMP



BYZ -810



MM SP-03

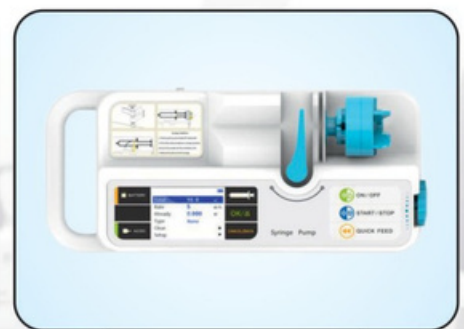

CONTEC SP-950

INFUSION PUMP



BYS-820



HK-100



SP-750

BIOHEARTZ

CAUTERY MACHINE



BIOHEARTZ - 400W-P



BIOHEARTZ - 400W



BIOHEARTZ - ANALOG 400W

		Max.Power(Watts)	RatedLoad(Ohms)
Operating Frequency		480 Khz	-
Display		7 Segment LED Digital	-
CUT	Pure Cut	400 W	500
	Blend 1	250 W	500
	Blend 2	200 W	500
	Endocut	99 W	500
COAG	Spray	120 W	500
	Fulguration	150 W	500
	Desiccation / Soft	150 W	500
BIPOLAR	Bipolar Coagulation Micro	80 W	100
	Bipolar Coagulation Macro	80 W	100
	Bipolar Cut	99 W	100

VESSEL SEALER CAUTERY MACHINE

Take advantage of vessel sealing function with other advantages of top and electro surgical units combine. The same systems performs procedures like hysterectomy along with other regular under water surgeries and those requiring Endo-cut Functionality. These features are available in BioHeartz Seal.

Mode	Max. Power Watt	Peak to Peak Voltage	Operating Frequency
Seal	150 W	700 (350)	480 khz



BIOHEARTZ-SEAL

STANDARD ACCESSORIES



Chuck Handle with Electrodes Autoclavable



Bipolar Forcep with cable Autoclavable



Monopolar / Bipolar Foot switch



Disposable Hand Switch Pencil - Imported



Patient Plate with Cord

Co2 INSUFFLATOR



FLOWLINK

- Showing set & actual pressure, set & actual flow,
- Inbuilt system gas heater
- Real Time Data Display
- Special feature that assures a constant pressure of the Co2
- Co2 has pressure range from 4 to 30mm Hg
- Input pressure MIN. to Max : 4-30 mm H
- (To an accuracy of 1 mm Hg)
- Flow rate min to max. 0.1 to 30 Ltrs / Min
- Internal over pressure release valve
- Output connection - 6 to 7 mm ID tube

LED LIGHT SOURCE



NUCLON

- High Power : **180 Watt**
- Friendly design, easy operation.
- **LED Life Span** : 65,000 Hours +
- Constant Color Temperature
- Low Energy consumption
- Digital User Interface for Intensity control.
- Noise-free imaging
- Light Cable Input Connector – universal Storz, stryker etc.
- Powerful illumination makes it suitable for Laparoscopy or other
- high end applications

TOURNIQUET



ACCU RELEASE




ACCU RELEASE-M


- Cuff pressure range : 10 to 450 mmHg
- Pressure regulation : Better than 10mmHg of set point (Maintains set pressure under leak conditions)
- Online setting : Increase and decrease in pressure settings
- Timmer : Range from 9 hours to 59 minutes (0:05 hours to 9.59 hours)
- Alarm : Audible Buzzer on set time equaling elapsed value, in intervals of 1 min, after alarm time
- Switch Over : Automatic switch Over from mains to battery of vice versa
- Power : 230V (AC) / 50Hz+10%
- Battery Charger : Constant Voltage, Current Limited & Auto Cutoff
- Digital display : Digital display of set pressure, actual pressure, elapsed time & set time
- Cuffs : Different size of five cuffs-washable & easy fitting
(Large, Big, Medium, Small & Pediatric)

BABY WARMER


NEO-GOLD

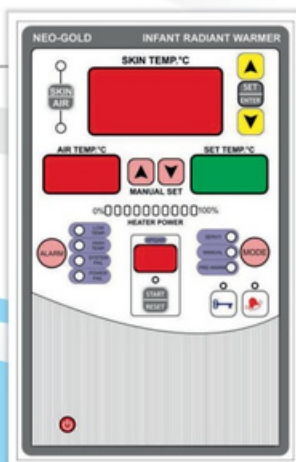

NEO-SILVER

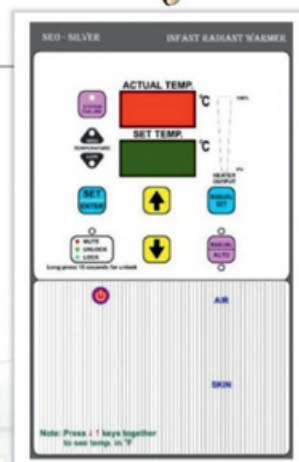

NEO-BRONZE

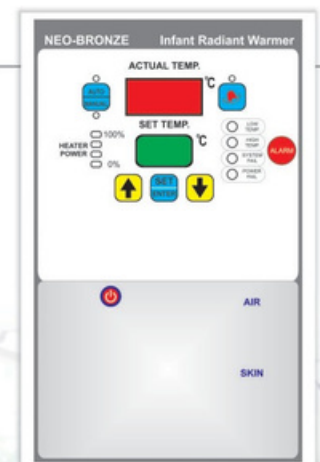

micro controller technology assure accurate maintenance of set temperature and real temperature.



Alarm indication of Low Temperature
High Temperature System Fail
Power Fail



Acrylic Baby Tray with tilt facilities for infant's head Up / Down



NEO-WAVE

LED PHOTOTHERAPY



**SINGLE SURFACE PHOTOTHERAPY
WITH TROLLEY**



DOUBLE SURFACE PHOTOTHERAPY



UPPER SURFACE PHOTOTHERAPY

- Wide Effective Area
- Long Life - >20,000 hrs.
- No UV/IR Radiation
- No Heat Generation
- Low Power Consumption
- Negligible Maintenance Cost
- Light Weight & Compact
- Flexible Neck for Easy Use
- Height and Angle Adjustment Facility
- Mounted on Castor Wheels for Easy Mobility
- Can be used in Conjunction with any make Radiant Warment
- Wave Length : 400-550 nm

NEO-LIGHT



**SINGLE SURFACE PHOTOTHERAPY
WITH TROLLEY**



DOUBLE SURFACE PHOTOTHERAPY



UPPER SURFACE PHOTOTHERAPY

FETAL MONITOR



BISTOS - BT-350



CONTEC - CMS-800G1

FETAL DOPPLER



200-D (Black & White)



200-C (Color)



300-D (Black & White)



300-C (Color)

SUCTION MACHINE



YUWELL 7E-A



YUWELL 7A-23D

BIPAP MACHINE



BEYOND - B30P



AED-7000



BIPHASIC-DEFIBRILLATOR



SPIROMETER SP - 10

FOGGER MACHINE

QUICK - FOGG



Model: QUICK - FOGG

SPECIFICATION :

Body & Tank : 304 Grade Stainless Steel
Tank Capacity : 5 Litre of Chemical Storage
Blower Motor : >26000 RPM Motor
Nozzle : 1 Counter Rotating Vortex Nozzle
Chemicals : Can atomize both oil-based and water-based liquids.
Control Valve : One turn. Brass Valve
Particle Size : 0.5-30 μ m, adjustable. Viscosity and density can affect particle size.
Range : Visible fog, 20-40 ft
Input : 230V 50Hz Single Phase AC Supply
Dimensions : [33 x 41 x 23.5 cm] L x H x Dia

1 YEAR WARRANTY

**AUTOMATIC
TIMER**



Other Model : • Plastic Body Fogger • Digital Timer Fogger

FUMIGATOR MACHINE



- **Body :** 202 SS Base Cabinet with Aluminum Legs (Plastic Legs Optional)
- **Liquid Capacity :** 5 Litre of Chemical Storage (Other Models Available With 3L Storage)
- **Motor :** 1/8 Hp Copper Winding, Aluminium Body Motor (ISI Motor Optional)
- **Blade :** Plastic Fan Blade For Long Lasting Use
- **Atomizing Capacity :** 30-35ml Per Minute
- **Fume :** High Pressure Fume Releaser
- **Power Supply :** 230 V 50Hz Power Supply

DIGITAL WEIGHT SCALE



WEIGHT SCALE 2 IN 1



BABY DIGITAL WEIGHT SCALE



WEIGHT SCALE 3 IN 1 WITH BLUETOOTH MODULE

LED OT LIGHT



1,40,000 Lux 48 LED

MLED-48



1,60,000 Lux 48 LED

MLED-48R



1,35,000 Lux 84 LED

MLED-84



1,00,000 Lux 42 LED

MLED-42



(1,40,000 Lux)

QUARKS-04



(1,60,000 Lux + 1,60,000 Lux)

MLED-48R DOUBLE DOME

◀ **MLED-42 Portable**



Examination Light ▶

25,000 Lux 07 LED



ECG ROLL




ECG PAPER ROLL

PREMIUM QUALITY ECG PAPER & NST MACHINE PAPER AVAILABLE FOR :

- CONTEC
- BPL
- GE
- MINDRAY
- SCHILLER
- PHILIPS
- BISTOS
- MAESTROS

- 50mm x 20 Mtr
- 55mm x 20 mtr
- 80mm x 20 mtr
- 105mm x 20 mtr
- 110mm x 20 mtr
- 210mm x 20 mtr
- 215mm x 20 mtr

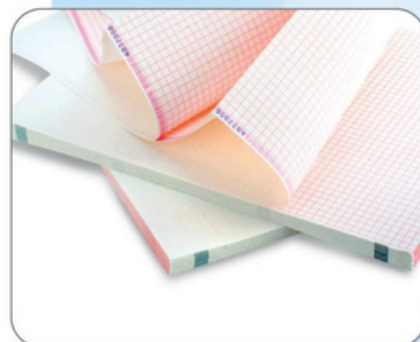


ECG PAPER Z FOLD



OXYGEN HOOD



ECG BULB



ECG CLAMP



CAUTERY PENCIL



PUSH/PULL CONNECTOR



LARYNGOSCOPE



NIBP CUFF



NIBP HOSE PIPE

INFANT VEIN FINDER



CLEARVEIN

MONITOR STAND

- This is a permanent fixed model where the monitor fixing area can be tilted up and down rotated left and right.
- Basket used for holding the accessories of the monitor
- **Material** : Aluminium and powder coated finish

SUITABLE FOR ALL MONITOR



MONITOR STAND

- The Arm Can be slided up and down and the monitor fixing area can be tilted up and down rotated left and right.
- Basket used for holding the accessories of the monitor
- **Material** : Aluminium and powder coated finish

SUITABLE FOR ALL MONITOR

